

SLIM GLASS LED

DALI
1-10V
1-100%

PFC



PF
< 3%

LM80

CRI
>80

CE





IP40



BIN

WERSJA 1x

1x VERSION

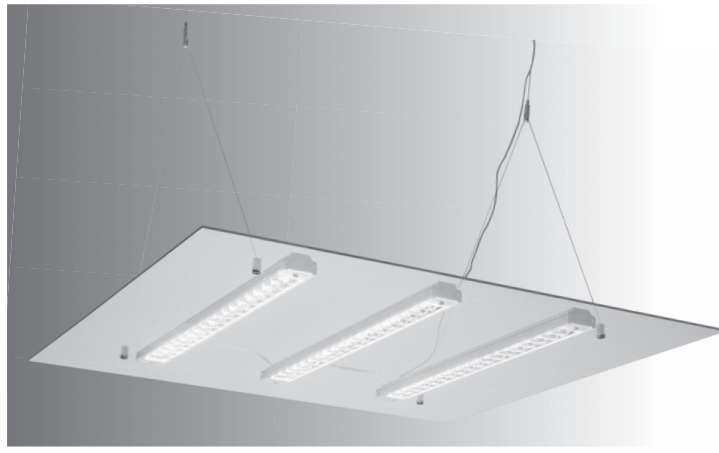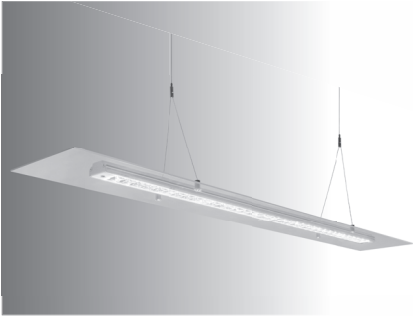


WERSJA 3x

3x VERSION




	L [mm]	W [mm]	H [mm]
1x	1400	190	32
3x	800	800	32

Standardowa długość zwieszki
maksymalnie 1,5 m
Standard length of suspension
maximum 1,5 m



ZAWIESZENIE
SUSPENSION

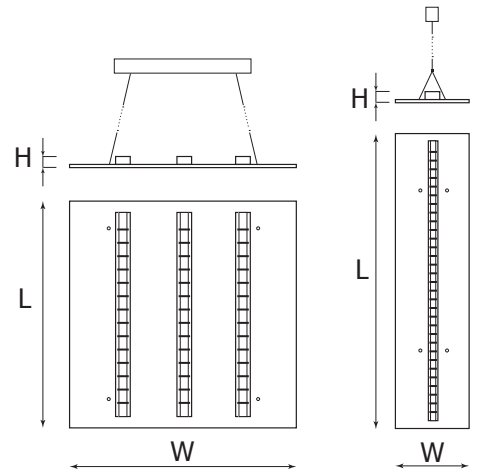

WERSJA 3x
3x VERSION

WERSJA 1x
1x VERSION

MODUŁ PAR LED

PAR LED MODULE



PL

Estetyczna oprawa zwieszana na źródła światła LED o niskim wskaźniku oślnienia UGR przeznaczona do montażu nad biurkami w holach recepcyjnych i biurach o podwyższonych standardach użytkowych.

Wykonanie: obudowa wykonana z profilu aluminiowego anodowanego (w standardzie kolor szary), szkło hartowane

Montaż: zwieszany

Zasilanie: 230 V


ENG

An aesthetic suspended luminaire using LED sources with a low glare rating (UGR), designed for installation over desks in reception areas or offices where higher functional standards are required.

Materials: housing made of anodised aluminium profile (standard colour: grey), tempered glass

Installation: suspended

Power supply: 230 V



SLIM GLASS LED

MOC POWER	ŹRÓDŁO LAMP	STRUMIEN OPRAWY [lm] FITTURE'S LUMINOUS POWER	SKUTECZNOŚĆ OPRAWY [lm/W] FITTURE'S EFFICACY	[kg]	INFO	KOLOR COLOUR	KOD CODE
27W	LED 3000K	2770	103	5,60	1x	■	PX4059201
27W	LED 4000K	2820	104	5,60	1x	■	PX4059208
40W	LED 3000K	4140	103	9,30	3x	■	PX4059215
40W	LED 4000K	4230	106	9,30	3x	■	PX4059222

